

Project:



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CR-1
Compact Countertop





Sparkling & Chilled Still Water on Tap

- Cold carbonation for better long lasting sparkling water
- Flow control faucets for Sparkling & Chilled Still water
- European design, mirrored finish stainless steel exterior
- Made in the USA

Specifications

- 50 liters per hour @ 40°
- Self-contained refrigeration system
- Compressor: 1/5 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,200 per hour Ave
- Operating temperature range: 40° - 100°
- Electrical: 120v - 9.6 Amps
- Carbonator: 1/3 H.P.
- Water Bath: 4 Gallons
- Ice Bank: 9.5 lbs
- Weight: 115 lbs
- Clearance: 12"
- 12.5"W x 31.375"D x 24.5"H

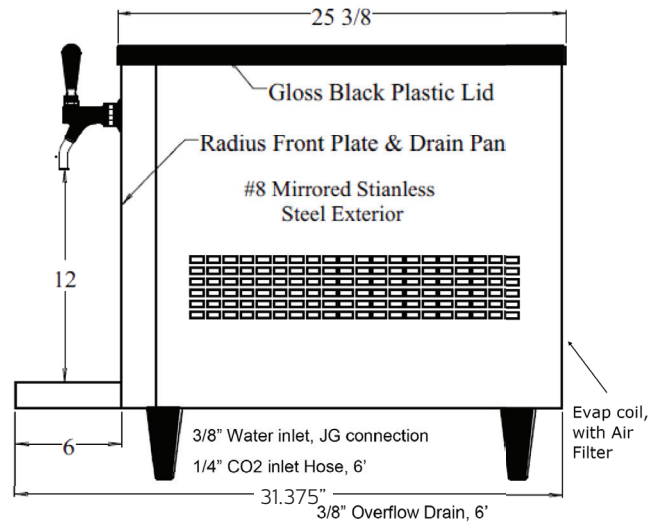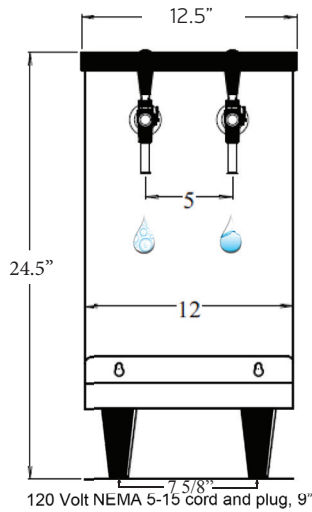

- 3/8" Water inlet connector
- 7' Over flow drain hose
- 7' CO2 hose 1/4" flare fitting
- 9' Electrical cord NEMA 5-15
- 4.25" legs

- Air intake at rear with air filter
- Allow for 6" rear & side clearance around unit for air flow
- Allow for 3" of rear clearance for connections

Accessories:

- CR-24FCP with Prefilter
- CR-24FC without Prefilter
Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- CR-KIT-CT
Installation Kit for Countertop Units, CR-1 & CR-2, Includes: water pressure reducer valve, fittings and oetiker clamps and extra tubing to install the filter systems and Countertop unit



- CR-3741
Primary High Pressure CO2 Regulator for CO2 tank



- Customer supplied CO2 Tank required

- Available: CR-1-3V; 3-Valve configured model - Sparkling, Ambient & Still Chilled



NSF Certified under NSF/ANSI Standard 18

